



**IS4225 ScanGlove** is a fully automatic single-line laser scanning device. Incorporating patented activation technology, the IS4225 can be used as a "hands-free" wearable scanner or a stationary desktop scanner.

Same great performance as IS4220, with more features!

Sunrise 2005 Compliant

## IS4225 ScanGlove®

### Features

- Hands-free or desktop scanning
- Fully automatic operation
- Lightweight and durable
- Breakaway cable for added safety
- Short or long range activation
- Flash ROM (RS232 model only)


**Metrologic's IS4225 ScanGlove** is a fully automatic single-line laser scanning device. Incorporating patented activation technology, the IS4225 can be used as both as "hands-free" wearable scanner or a stationary desktop scanner.

Used as a wearable scanner, the IS4225 mounts easily and comfortably to the back of an operator's hand. By mounting the scanner to the back of the hand and connecting to a portable data collector, the operator is not restricted and can freely move about. The scanner reads bar codes automatically as the operator presents the scanner to the code. Whether used for order picking, shipping/receiving, or inventory control, this simple scanning movement will undoubtedly provide increased flexibility for the operator and ultimately

render increased productivity.

The distinct design of the IS4225 allows for the same scanning function and automatic activation, but in a completely different environment. When the IS4225 is connected directly to a personal computer, document scanning and order entry are made simple and fast. By presenting the bar code to the scanner, data can be automatically entered into a computer.

The IS4225 scanner has built in decoding for applications that use a RS232, Keyboard Wedge, Stand Alone Keyboard, Light Pen Emulation or USB communication interface.

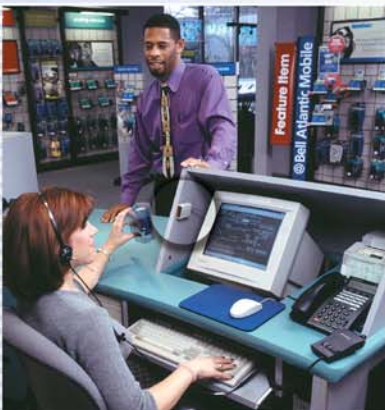

# IS4225 ScanGlove®

## OPERATIONAL

Light Source	Visible Laser Diode 650 nm ± 10 nm
Laser Power	0.800 mW (peak)
Depth of Scan Field	12.7 mm - 203 mm (0.5" - 8") for 0.33 (13 mil) bar code
Width of Scan Field	28.6 mm (1.125") @ face; 102 mm (4") @ 76.2 mm (3")
Scan Speed	52 scan lines per second
Scan Pattern	Single scan line
Minimum Bar Width	0.173 mm (6.8 mil)
Decode Capability	Autodiscriminates all standard bar codes; for other symbologies call Metrologic
System Interfaces	RS232, Light Pen Emulation, PC Keyboard Wedge, Stand Alone Keyboard, USB (low speed)
Print Contrast	35% minimum reflectance difference
Number Characters Read	Up to 80 data characters
Roll, Pitch, Yaw	42°, 68°, 52°
Beeper Operation	3 tones or no beep
Indicators (LED)	Red = laser on, ready to scan; Green = good read

## MECHANICAL


Dimensions	Length: 70 mm (2.75") Width: 49 mm (1.94") Height: 24 mm (0.94")
Weight	105 g (3.7 oz)
Termination	Breakaway connector or 10 position modular RJ45
Cable	Straight, breakaway or 1.5 m (5') coiled

## ELECTRICAL


Input Voltage	5 VDC ± 0.25 V
Power	0.75 W
Operating Current	135 mA
DC Transformers	Class 2; 5 VDC @ 300 mA
Laser Class	CDRH and IEC Class 2 in accordance with IEC 60825-1:1993+A1:1997 +A2:2001
EMC	FCC Class A, CISPR Class A

Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Storage Temperature	-40°C to 70°C (-40°F to 158°F)
Humidity	5% to 95% relative humidity, non-condensing
Light Levels	Up to 4842 Lux (450 footcandles)
Shock	Designed to withstand 1.5 m (5') drops
Contaminants	Sealed to resist airborne particulate contaminants
Ventilation	None required

## Scan Area

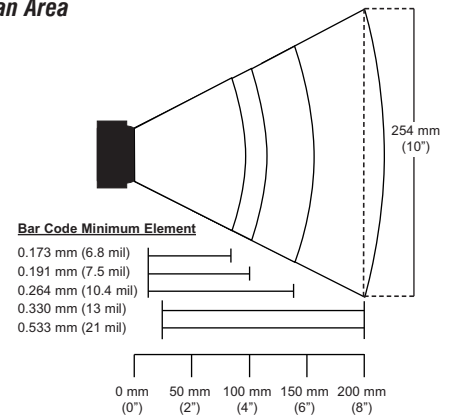

## Dimensions

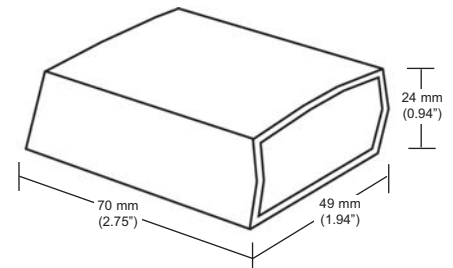

### Standard ScanGlove Colors

Sample only, actual colors may vary



ScanGloves are available in a variety of other colors with minimum quantity purchase



Specifications subject to change without notice.  
Printed U.S.A., Copyright March 2005  
Metrologic, All rights reserved.



ISO 9001:2000

Metrologic Instruments, Inc. | **Worldwide Headquarters**  
90 Coles Road | Blackwood, NJ 08012-4683 | info@metrologic.com  
Telephone 856-228-8100 | Fax 856-228-6673

**Asian Headquarters**  
Tel. 65.6842.7155  
info@sg.metrologic.com

**European Headquarters**  
Tel. 49.89.89019.0  
info@eu.metrologic.com

**North American Headquarters**  
Tel. 1.800.ID.METRO  
info@na.metrologic.com

**South American Headquarters**  
Tel. 5511.5182.7273  
info@sa.metrologic.com



DS4200